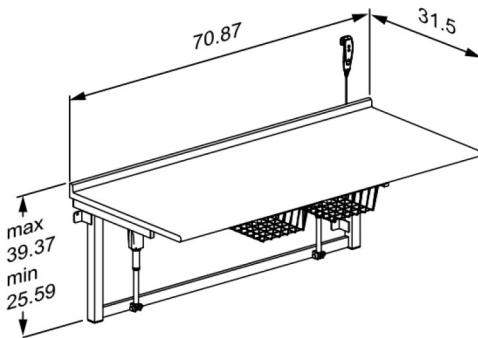




PRESSALIT®

Product Item number	Changing table, 31.5" x 70.9", electrically height adjustable R8913000
Color	EAN:5708590367163 White
Product description	 <p>Pressalit offers a wide variety of changing tables designed for use in daycare facilities. The tables are available in several sizes and models, either free standing or wall-hung. The fold away feature in wall-hung tables is useful where space is limited. The wall-hang tables with low start are essential for daycare or preschool facilities. Even toddlers can climb onto the table themselves, without the staff lifting them.</p> <p>Changing table, wall-mounted, 31.5" x 70.9". With motor and transformer, height adjustable from 25.6" - 39.4", with hand control. Laminate worktop, incl. 2 wire baskets. Materials: Laminate and powder-lacquered steel. Excl. fixing kit.</p>
Adjustability	Height adjustable
Adjustment height	13,79 inch
Product capacity	Max load: 330 lbs.
Speed up	Speed up: 0,55 inch/s Speed down: 0,55 inch/s
Noise level	48 dB
Materials	Lifting unit and baskets: Powder-coated steel. Countertop: Melamine
Ergonomy	The smooth height adjustment ensures that it is always possible to set the table at an ergonomically correct height.
Features	Easy-to-clean surfaces ensure optimum hygiene.
Mains connection (V)	120



PRESSALIT®











Product	Changing table, 31.5" x 70.9", electrically height adjustable
Item number	R8913000
Actuator (motor)	2 x LA31 Deskline (Linak), 1500N, IPX1
Control box	CBD6 (Linak), IP20
Wired remote control	HB30 (Linak), IPX4
Power consumption (maximum load)	Power consumption by maximum load: 96 W Power consumption by standby: 0,1 W
Warranty	Pressalit makes a commitment to remedy material and manufacturing defects for a period of three years from the invoicing date.
Cleaning	<p>This product should be cleaned with hot water or a mild cleaning solution. Do not use chlorine based, corrosive or abrasive cleaners as it may result in the surface being damaged.</p> <p>The following cleaning agents have been tested by Pressalit and may be used, as long as they are diluted according to the instructions on the container.</p> <p>DISINFECTANTS: Clinimax Difficil-S Erisan OXY+ Sprit (husholdningssprit) Suma Bac D10 Virkon Rodalon Desinfektionsspray Lysoformin Spezial CaviCide Sufanios Premium Tvättsprit 70%</p> <p>NON-DISINFECTANTS: Suma Star free D1 Taski 100 Taski 200 Milizid Citro</p> <p>The product must be wiped down with a soft rag wrung out in clear water immediately after cleaning, as some materials may otherwise be discolored and stained, and the surface coating may deteriorate.</p>
Declaration of conformity	This product is solely intended for the US and Canada, and has no EU declaration of conformity.



PRESSALIT®







Product	Changing table, 31.5" x 70.9", electrically height adjustable
Item number	R8913000

Mounting in different wall types

	Concrete >B25 V8608 - Mounting kit, 6 lag bolts Ø10 x 70 - plugs SX12. To be ordered separately.	
	Solid Brick >= Mz12 V8608 - Mounting kit, 6 lag bolts Ø10 x 70 - plugs SX12. To be ordered separately.	
	Solid Sand Lime Brick >= Hlz12 V8608 - Mounting kit, 6 lag bolts Ø10 x 70 - plugs SX12. To be ordered separately.	
	Aerated Concrete P4 V8658 - Mounting kit, 6 lag bolts Ø10 x 70 - plugs GB14. To be ordered separately.	
	Drywall (2 x 12,5 mm) water-resistant, re-enforced with wood V8608 - Mounting kit, 6 lag bolts Ø10 x 70 - plugs SX12. NB! Plugs are not needed. To be ordered separately.	



PRESSALIT®

Product Item number	Changing table, 31.5" x 70.9", electrically height adjustable R8913000
	<p>Drywall (2 x 12,5 mm) water-resistant, re-enforced with 22 mm plywood</p> <p>Wall fasteners (6 pcs) must be bought separately, for drywall it is possible to use e.g. SnapTight or WingIt anchors or similar.</p> 
	<p>Drywall (2 x 12,5 mm) water-resistant, re-enforced with steel plates (.08 inch)</p> <p>Wall fasteners (6 pcs) must be bought separately, for drywall it is possible to use e.g. SnapTight or WingIt anchors or similar.</p> 
	<p>Drywall (2 x 12,5 mm) water-resistant</p> <p>Mounting in this wall type is not recommended - risk of fatal injury to persons and walls.</p> 

pressalit.com